



OSCAR ONO - Forêt

Surfaces Collection

Oscar Ono - Forêt collection is revolutionary handmade flooring and wall covering marquetry. With innovative approach, pre-assembled endgrain oak pieces on simple planks. This collection contains 6 timeless patterns to customize perfect compositions for any projects.

Characteristics



Low Formaldehyde

Safe for all living and interior applications, especially enclosed spaces.



Climate Neutral

Surfaces help maintain and regulate room temperature at a comfortable level.



Sustainable

By recollecting those small pieces as leftovers from classical production, endgrain wood creates outstanding surfaces with minimal wastage of natural resources.



Tactile sensation

Sophisticated wood grain texture is preserved and kept pronounced, at the same time refined, making the surfaces pleasant to touch.

Colours



Nature
F101




Smoke
F102



Black
F103

Patterns

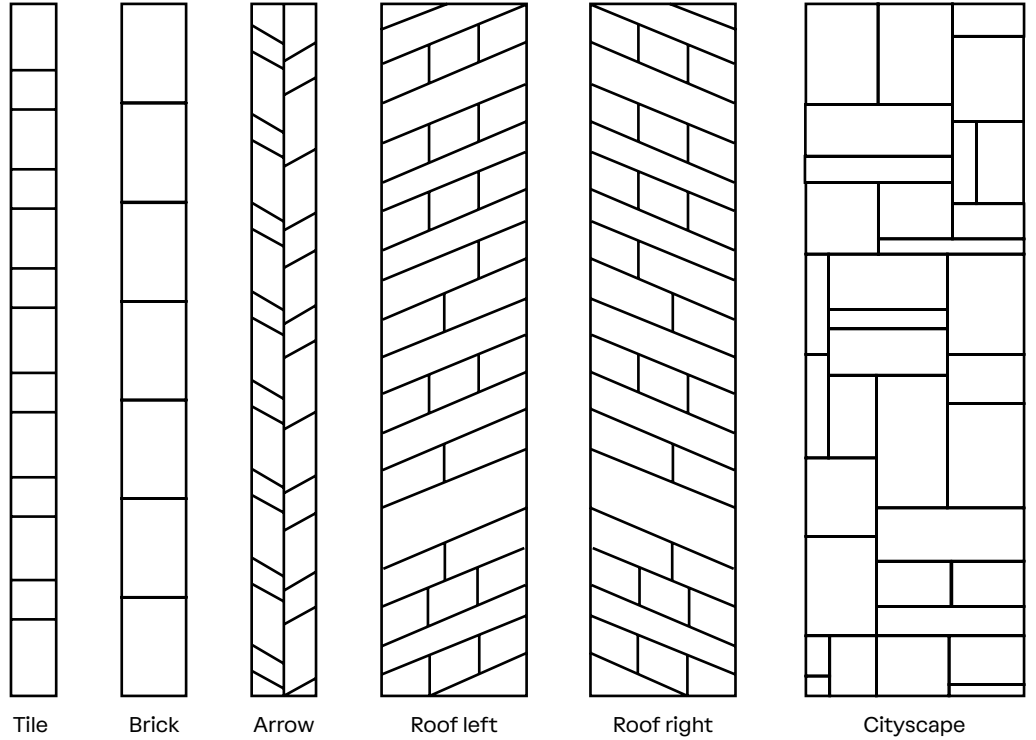

Versions



End-grain



Twirl end-grain



Simple flat-grain



XXL flat-grain

Technical Specifications

Foret & Foret Simple

Dimensions

Type of patterns	Tile	Brick	Arrow	Roof Left	Roof Right	Cityscape
Thickness	12 + 8 (12mm Birch waterproof quality, D4 adhesives; 8mm Oak toplayer)					
Width x length mm	38 x 1520	50 x 1520	69 x 1510	138 x 1510	138 x 1510	200 x 1510
m2/Board	0.06	0.08	0.10	0.20	0.20	0.30

*"Arrow" comes in 2 boards, "Arrow L" and "Arrow R" together counting for 69 mm width

Foret XXL

Dimensions

Type of patterns	Tile	Brick	Arrow	Roof Left	Roof Right	Cityscape
Thickness	12 + 8					
Width x length mm	76 x 1520	100 x 1520	138 x 1520	275 x 1520	276 x 1510	3096 x 1510
m2/Board	0.12	0.15	0.21	0.36	0.36	0.60

*"Arrow" comes in 2 boards, "Arrow L" and "Arrow R" together counting for 138 mm width

Certifications

Properties	Unit	Result
Fire Resistance	Class	Cfl-S1
VOC Emissions	Class	E1/ ISO 16000
Thermal Resistance	m2 K/W	0.14 m2 (depending on the installation surface)
Brinell hardness rating		3.7 (medium-hard wood: 2.5 to 3.8)

Climatic Conditions

Properties	Rate
Wood Products	8-12% moisture
Ideal Indoor Environment	40-60% humidity