
PANELOGUE

Technical Datasheet

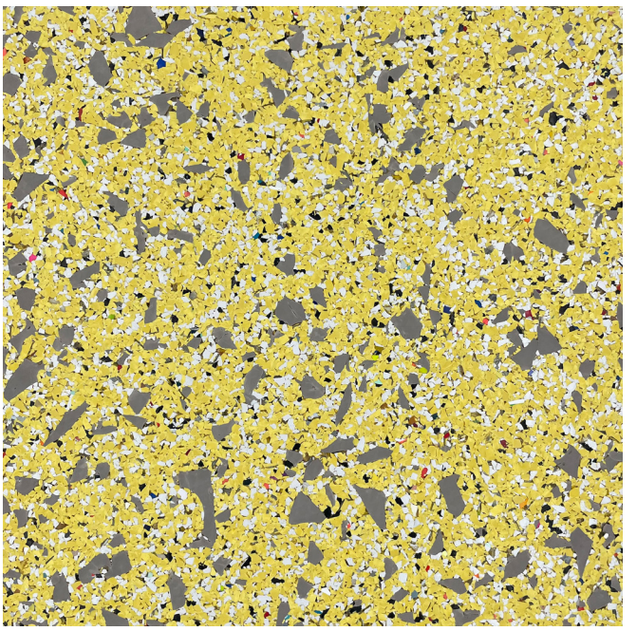

Heroflooring

Surfaces Collection

Nike Grind Rubber made from granulated end-of-life athletic Nike shoes blended with EPDM to form a dense, resilient composite. Engineered for durability and acoustic comfort, it is a stable, long-wearing material for high-use spaces.

Designed for high-impact spaces, Heroflooring is water-resistant, slip-resistant, and acoustically absorbent, making it the ideal choice for gyms, schools, play areas, commercial spaces, and high-traffic environments. Whether you're creating a fitness studio, a learning space, or a stylish commercial interior, Heroflooring delivers lasting performance without compromising on aesthetics.

Content	EPDM Rubber & Recycled Nike Grind	
Thickness	4 / 8 / 12 (mm)	
Dimension	**Straight Edge**	610 x 610 / 1219 x 1829 (mm)
Thickness	**Interlocking**	610 x 610 / 1219 x 1829 (mm)
	Roll	1219 x 7620 (mm) Original 8 (mm) Collection Only

Characteristics



Sustainable

Sustainable material made from recycled rubber from end-of-life athletic shoes and Nike Grind Rubber.



Durable

High-performance rubber flooring designed for durability and resilience in high-traffic spaces.



Impact Resistant

Provides cushioning and impact absorption for improved underfoot comfort.



Sound Absorption

Helps reduce impact noise and improve acoustic comfort in interior spaces.

Certifications

floor score

Declare. Red List Free


UL CERTIFIED ENVIRONMENTAL PRODUCT DECLARATION UL.COM/EPD

Panelogue © 2026


PANELOGUE

Technical Datasheet


ORIGINAL




1) Shine 111




2) Spark 242




3) Ignite 333




4) Thrive 347




5) Pulse 368




6) Elevate 434




7) Focus 535




8) Swim 537




9) Navigate 565



10) Grow 636




11) Bloom 656




12) Dream 738




13) Root 848




14) Build 878



15) Play 937



16) Balance 938




17) Hustle 987

Panelogue © 2026

PANELOGUE

Technical Datasheet


VITALITY




18) Goldfinch 139




19) Fox 249




20) Berry 357




21) Peppermint 363




22) Desert Sunset 378




23) Jellyfish 447




24) Peacock 536




25) Iceberg 557



26) Silver Sky 579



27) Parakeet 627




28) Succulent 649




29) Dove 739




30) Dalmatian 759




31) Husky 947



32) Treasure 958



33) Koala 959



34) Zebra 967

Panelogue © 2026

PANELOGUE

Technical Datasheet


AXIS




35) Medallion 111



36) Tangerine 242




37) Rose 333



38) Carnation 347



39) Garnet 368




40) Lilac 434



41) Cobalt 535



42) Arctic 537



43) Admiral 565



44) Lime 636



45) Shamrock 656



46) Alabaster 738



47) Hazelnut 848



48) Mocha 878



49) Silver 937



50) Fossil 938




51) Raven 987

Panelogue © 2026

PANELOGUE

Technical Datasheet


Custom Colours




2H Pastel Green



3Y Lime Green




L3 Reseda Green




1C Ocean Green




03 May Green




1P Signal Green




2M Reed Green




7D Pine Green




08 Turquoise




2G Aqua




04 Blue




5D Royal Blue




1Q Ultramarine Blue




3A Capri Blue




4T Blueberry




3Z Night Purple




07 Purple



7H Heather Violet



4U Blackberry




6C Wine Red

Panelogue © 2026

PANELOGUE

Technical Datasheet




2R Purple Red



02 Red



1R Hot Tamale



1L Caliente Red



7E Rose




10 Orange



1K Pastel Orange



3C Earth Yellow




09 Yellow




11 Brown



1T Sepia Brown



2L Chestnut



2F Chocolate



5C Pearl




3D Eggshell




L5 Ash Grey




05 Light Grey



2J Pebble Grey



2N Concrete Grey




7G Blue Grey


Panelogue © 2026

PANELOGUE

Technical Datasheet



1W Rock Grey



2E Moss Grey



1B Fawn



1H Green Beige



06 Beige



2K Khaki



3B Charcoal

Panelogue © 2026

PANELOGUE

Technical Datasheet

Technical Specifications

Introduction

Hero Flooring is a high-performance rubber flooring collection incorporating recycled Nike Grind rubber. Available in Original, Vitality and Axis, the collection offers a range of colours, thicknesses and installation formats for commercial interiors. The flooring combines durability, resilience, acoustic performance and underfoot comfort, with custom waterjet-cut designs available for branding and wayfinding.

Properties	Test	Unit	Result
Density	ASTM D3676	kg/m^3	Approx. 1,076
Breaking Load	ASTM D412	lbs	65.91
Elongation	ASTM D412	%	75.83
Tensile Strength	ASTM D412	psi	271.8
Hardness	ASTM D2240	Shore A	70
Static Load – Residual Compression	ASTM F970	inches	0.029
Surface Finish Effect	ASTM E303	BPN (Dry)	Collection specific
Static Coefficient of Friction	ASTM C1028	-	Collection specific

Collection Specifications

Properties	Original	Vitality	Axis
Static Coefficient of Friction (Dry)	0.85	0.82	0.75
Static Coefficient of Friction (Wet)	1.01	0.63	0.84
Surface Finish Effect (Dry)	63 BPN	66 BPN	89 BPN

ASTM C1028 and ASTM E303 results as reported in the respective Mohawk brochures. Do not substitute these values for compliance with a different slip-resistance standard.

Format	Original	Vitality	Axis
Straight Edge Tile	4 / 8 / 12 mm	4 / 8 / 12 mm	8 / 12 mm
Interlocking Tile	8 / 12 mm	8 / 12 mm	8 / 12 mm
Roll	8 mm	-	-

Panelogue © 2026

PANELOGUE

Technical Datasheet

Properties	Test	Unit	Result
Impact Sound Transmission	ASTM E492	IIC	56 (4 mm) / 59 (8 mm)
Critical Radiant Flux — Original (6 mm)	ASTM E648	W/cm²	0.37
Chemical Resistance	ASTM F925	—	No Change
Mildew Resistance	ASTM G21	—	No Mildew After 28 Days
Electrical Resistance — Surface to Surface	ASTM F150	Ω	3.9×10^{11}
Electrical Resistance — Surface to Ground	ASTM F150	Ω	1.9×10^{11}
Static Decay	FTM 101B / NFPA 99 Method 4046	seconds	11.50
Static Coefficient of Friction	ASTM C1028	-	Collection specific

Maintenance & Cleaning	
Cleaning Agent	Neutral pH Cleaner
Routine Cleaning	Vacuum or Sweep
Cleaning Method	Microfibre Mop / Automatic Scrubber

Panelogue © 2026

PANELOGUE

Technical Datasheet

Heroflooring Application Areas

Commercial & Public Spaces	
Retail Stores & Showrooms	•
Offices & Workplaces	•
Entrance Lobbies & Reception Areas	•
Schools & Educational Facilities	•
Libraries	•
Museums & Exhibition Spaces	•
Theatres & Entertainment Venues	•

Sports, Recreation & Wellness	
Recreational Areas	•
Gyms, Fitness & Exercise Areas	•
Physical Therapy & Rehabilitation Spaces	•
Dance Studios	•
Indoor Play & Activity Areas	•

Decorative & Custom Applications	
Decorative Flooring	•
Custom Waterjet-Cut Designs	•
Logos & Branding Inlays	•
Wayfinding & Floor Graphics	•
Custom Patterns & Colour Combinations	•

Environmental & Special Applications	
General Indoor Flooring	•
Outdoor Flooring Exposed to Weather	
Shower Areas & Wet Rooms	
Commercial Kitchens & Grease-Prone Areas	
Heavy Industrial / Forklift Traffic Areas	
Chemical-Exposure Environments	
Fire-Rated Flooring Assemblies	

• Recommended

Panelogue © 2026